



TAYLOR[®]
by **FRIGOMAT**

FR 260

Batch Freezer

FR260

Features

The **FR 260** is the operators' requirements for a professional machine to produce Italian Ice, Sorbet or Granita.

Manufactured in Italy by Frigomat with an improved design to ensure Italian equipment quality and technology.

The FR260 is designed after the Taylor Model 220.

Capacity

The **FR 260** comes with a generous 28-quart barrel.

Beater Motor

The **FR 260** is improved with an increase to 2 HP.

CHARACTERISTICS

- Semi-automatic freezing cycle with viscosity setting.
- Semi-automatic freezing cycle with time setting.
- The machine stops automatically when the setting is reached.
- A buzzer alerts the operator at the end of the cycle.

ADVANTAGES AND PLUSES

- Stainless steel freezing cylinder and beater.
- Beater with mobile and removable scrapers, completely dismountable to ensure a very easy sanitation.
- Cylinder-block steel door with a large hopper to easily pour directly into the barrel the liquid mix and even solid ingredients.
- A wide extraction tap allows to easily eject chocolate pieces, nuts, candies, fruits, etc.
- The tap allows to directly fill both the containers for display cases/tubs and for packing.
- Double safety system on hopper grid and door.
- Wide and adjustable shelf with nonslip pad to fit different container size



Conforms to
ANSI NSF STD 6



Conforms to ANSI
UL STD 621
Certified to CAN
CSA STD 22.2
NO 120

3174126

ABS & Taylor Enterprises, Inc.

5002 West 123rd Street, Alsip, Illinois 60803
Phone: 1-708-233-1472, Fax: 1-708-233-1467

www.absandtaylor.com



e-mail: info@absandtaylor.com



Azienda Certificata
UNI EN ISO 9001:2015
Numero Certificato
50 100 5650



FR260 Batch Freezer

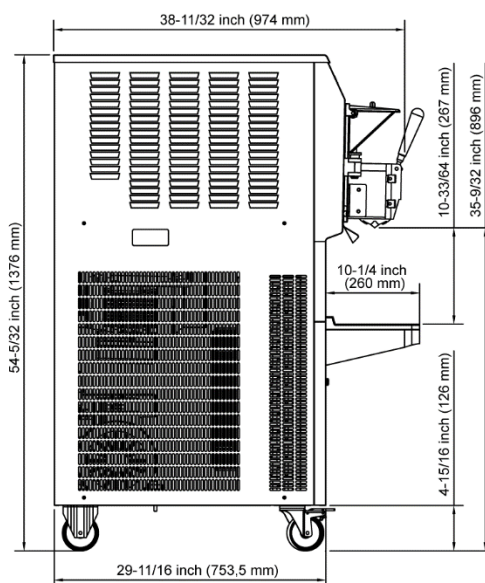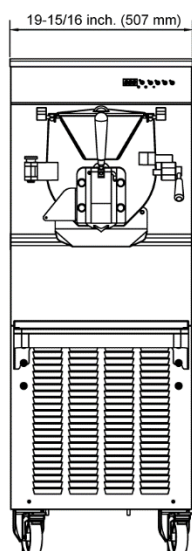

Weights	lbs.	kgs.
Net	513	233
Crated	617	280
Shipping Volume	cu. ft.	cu. m.
Crate	28.3	0.80

Dimensions	in.	mm.
Width	19-15/16	507
Depth	38-11/32	974
Height	54-5/32	1376

Counter Clearance: 5" mounted on standard legs.

Electrical	Maximum Fuse Size	Min. Cir. Amp.
208-230/60/1 Air	50	35

(For exact electrical information, always refer to the data label of the unit.)

Bidding Specs	
Electrical: Volt	Hz _____ ph _____
Neutral: <input type="checkbox"/> Yes <input type="checkbox"/> No	Cooling: <input type="checkbox"/> Air <input type="checkbox"/> Water <input type="checkbox"/> NA
Options: _____	

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Frigomat distributor for cord & receptacle specifications as local codes allow.

Freezing Cylinder

One, 26,5 lt. (28 quart).

Beater Motor

One, 1500 W (2 HP).

Refrigeration System

One, approximately 4600 W. R404A
(@ - 23.3°C evap. / + 45°C cond.)

Air Cooled

Minimum 150 mm (6") on both sides and 300 mm (12") at rear. Minimum air clearances must be met to ensure adequate air flow for optimum performance.

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



FRIGOMAT
ISO 9001:2015
Registered Firm