

358

Thick Shake Freezer



Features

Serve a wide variety of frozen desserts, like thick shakes and smoothies, with the assurance of safe temperatures for dairy products. Direct-draw a single flavor, or blend in flavorings for more variety.

Freezing Cylinder

One, 7 quart (6.6 liter).

Refrigerated Mix Hopper

One, 20 quart (18.9 liter). Refrigerated to maintain mix temperature below 41°F (5°C).

Indicator Lights

If the freezer is out of mix, the Mix Out light will illuminate, and the freezer will shut down automatically to prevent damage. Less than one pint (0.5 liter) is left in the hopper when the Mix Out system is activated.

Solid-State Controls

Thermistor control precisely monitors temperature and maintains consistent quality in product texture through solid-state technology.

Thumb-Grip Draw Handle


Draw handle makes dispensing of product easy by squeezing two levers together.

Fast Ejection

The beater design ejects product quickly to serve customers faster. Dispense a 16 fl. oz. (473 ml) serving in approximately 3 seconds.

Plastic Hopper Cover

The durable plastic hopper cover maintains its shape through years of use.

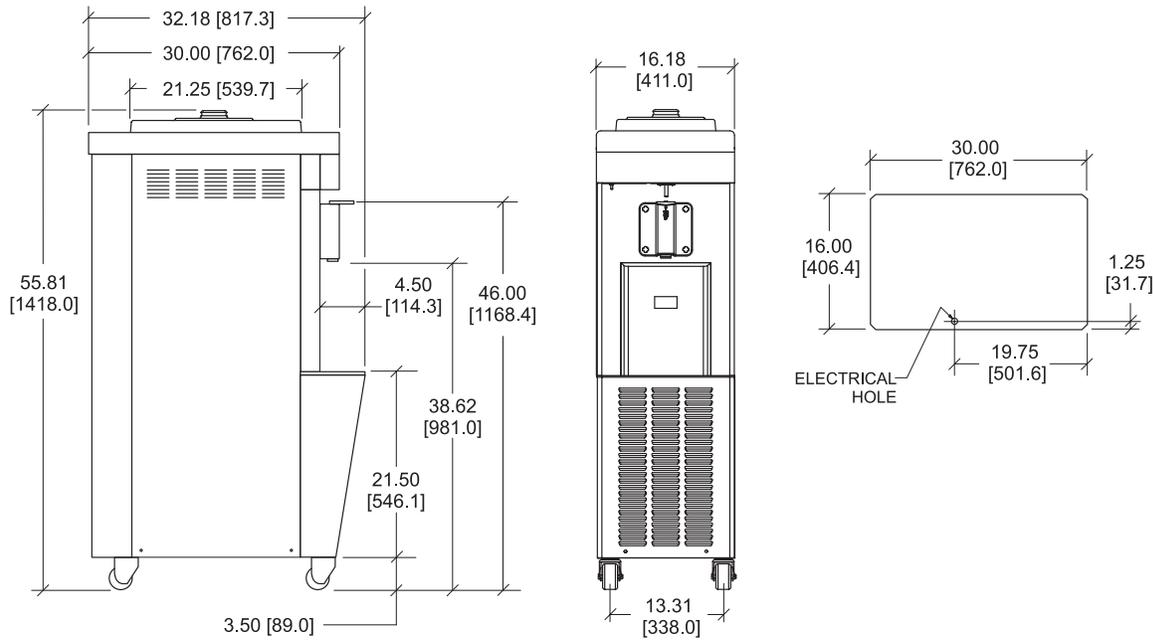

TOP VIEW - OPERATOR END
ALL CONNECTIONS LOCATED UNDERSIDE OF BASE

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO (PLUS OR MINUS 1/16 INCH [1.5mm]).

Weights	lb.	kg
Net	356	161.5
Crated	400	181.4

*For reference only

	cu. ft.	cu. m
Volume	22.8	0.64

Dimensions	in.	mm
Width	16-3/16	411
Depth	32-3/16	818
Height	53-1/2	1359
Floor Clearance	3-1/2	89

*Mounted on standard casters

Electrical	Maximum	Minimum	Poles (P)
	Fuse Size	Circuit Ampacity	
208-230/60/1 Air	30	20	2P 3W
208-230/60/1 Water	30	19	2P 3W
208-230/60/3 Air	15	14	3P 4W
380-415/50/3N~ Air	10	9	4P 5W

This unit may be manufactured with other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information, approval marks, and refrigerant, always refer to the data label of the unit.)

Continuing research results in steady improvements. Therefore, these specifications are subject to change without notice.

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: Yes No Cooling: Air Water NA

Options: _____

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

Authorized Taylor Distributor

Specifications

Electrical

One dedicated electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

Beater Motor

One, 1.5 hp.

Refrigeration System

One, approximately 7,100 BTU/hr. R449A.
(BTUs may vary depending on compressor used.)

Air-Cooled

Minimum Clearance: 3 in. (76 mm) around all sides. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

Options

- Bumper Kit



750 N. Blackhawk Blvd.
Rockton, Illinois 61072
www.taylor-company.com